

# Bearing Protection

Air Purge Control Panel for LabTecta® IAP/OAP



- All in one air purge supply for the LabTecta® IAP/OAP
- Available for both single and double seal setups
- Flow alarms optional

## Air purge control panel suitable for use with LabTecta® IAP/OAP

Eliminate the cause of over 50% of bearing failures

The air purge control panel is designed for use with the LabTecta®66 IAP/OAP bearing protectors. When connected to a supply of compressed air the panel provides air filtration and precise control of the air flow. The air purge control panel can be configured for either one or two seals.

Major benefits are:

- Reduced installation time
- Integrated isolation valve
- Air flow monitoring with optional alarm detects sudden increase or decrease in air flow
- Robust enclosure




Single Air Purge Control Panel



LabTecta®66 IAP



LabTecta®66 OAP

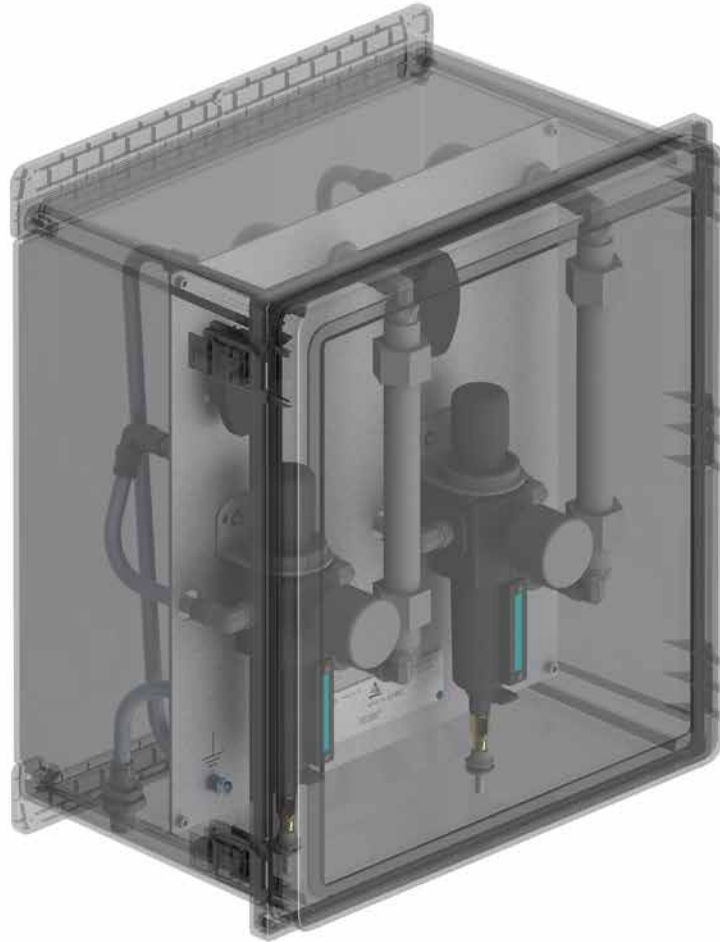

**Double Air Purge Control Panel**

<b>Technical Data</b>	
Pressure Rating:	9 bar (130psig) Max
Air flow rating:	164 l/min (5.8 SCFM)
Temperature Range:	0 to 60 °C (32 to 140 °F)
Dimensions: (l x d x h)	458 x 389 x 236mm (18.03 x 15.32 x 9.29") - Single 507 x 440 x 286mm (19.96 x 17.32 x 11.26") - Double
Enclosure material	Polyester



ENVIRONMENTAL TECHNOLOGY

To experience the exceptional, please contact your local representative. Discover full details on our website:

[www.aesseal.com](http://www.aesseal.com)

This brochure is fully recyclable. When laminated, a sustainable, biodegradable and recyclable lamination is used.

For further information and safe operating limits contact our technical specialists at the locations below.



**AESSEAL plc is certified to:**

ISO 9001, ISO 14001, ISO/IEC 20000, ISO/IEC 27001,  
ISO/TS 29001, ISO 37001, ISO 45001 & ISO 50001

Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing

**WARNING**

**UK Sales & Technical advice:**

AESSEAL plc  
Mill Close  
Bradmarsh Business Park  
Rotherham,  
S60 1BZ, UK  
Tel: +44 (0) 1709 369966  
E-mail: [enquiries@aesseeal.info](mailto:enquiries@aesseeal.info)  
[www.aesseal.com](http://www.aesseal.com)

**Net Zero champions globally**

**USA Sales & Technical advice:**

AESSEAL Inc.  
355 Dunavant Drive  
Rockford,  
TN. 37853,  
USA  
Tel: +1 865 531 0192  
E-mail: [usa@aesseeal.com](mailto:usa@aesseeal.com)  
[www.aesseal.com](http://www.aesseal.com)

**Important:** Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.