

LabTecta®TP

Engineered Bearing Protection for use
with tilting pad bearings



Improved

- Equipment life
- Process uptime
- Operational profit
- Environment

Reduced

- Bearing failures
- Maintenance cost
- Operational losses
- Clean-up costs



Improving Rotating Equipment Reliability by Preventing Bearing Failure



LabTecta®TP — for use with tilting pad bearings

The LabTecta®TP is specifically designed for use with tilting pad bearings allowing up to 0.025" axial movement.

Through its dynamic lift technology, the equipment is allowed to breathe while running, while oil loss is prevented using the internal zenith barrier. The multi-tiered labyrinth keeps water, dust and contamination from entering the bearing chamber. The LabTecta®TP is non shaft wearing and maintenance free.

Reducing Bearing Failure

52% of bearing failures are due to contamination of the bearing oil*. This represents 20.8% of all rotating equipment failures.

A major study into equipment reliability has shown 48% of all bearing failures are due to particle contamination of the bearing oil, with an additional 4% due to corrosion caused by contamination of the bearing oil.

Reducing Water Contamination

Research conducted by a major academic institution has shown that water contamination as low as 0.002% (20ppm) in some oils can reduce bearing life by as much as 48%. LabTecta®TP reduces bearing failure by:



- Preventing water ingress
- Preventing dust ingress
- Eliminating shaft damage due to rubbing
- Non-contacting design, thus no wearing of O'ring

ATEX Certified

Complying with ATEX directive 2014/34/EU, the LabTecta®TP is available certified for use in Group I M2 (Mining) and Group II Cat 2 & 3 (Zone 1/21 & 2/22) equipment.



* Bloch, Heinz; "Pump Users Handbook: Life Extension" 2011.

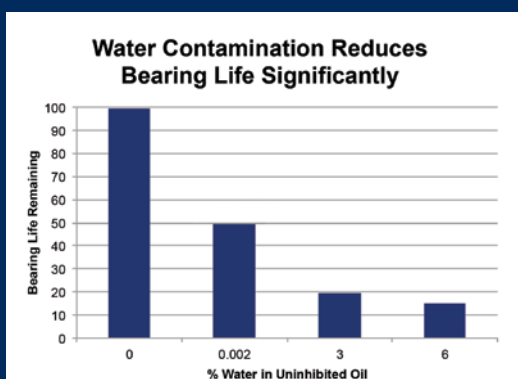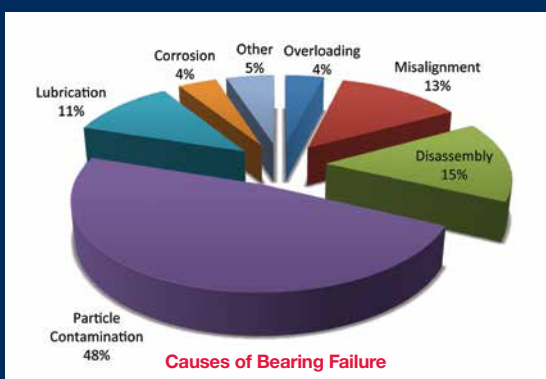

Tilting Pad Bearings

Tilting pad bearings have sectional pads on pivots which accommodate high axial load of the equipment shaft. They are typically fed by forced oil lubrication which creates a fluid film between the moving parts allowing the shaft to rotate with reduced drag. Tilting pad fluid bearings are used in a wide variety of heavy-duty rotating equipment, including centrifugal pumps and turbines.


LabTecta®TP Features & Benefits

- **Zenith Barrier** - Prevents loss of oil from the bearing chamber
- **Multi-tiered labyrinth** - Keeps water, dust & contaminants out, improving bearing life
- **Water Expulsion Port** - Further protects against water ingress
- **Non-wearing** - Eliminates shaft wear in operation
- **Maintenance free** - No routine maintenance required

ØA	B	C	D
16mm - 99mm	7.0mm	7.3mm	14.3mm
100mm - 145mm	7.0mm	9.1mm	16.1mm
0.750" - 3.937"	0.277"	0.286"	0.563"
4.000" - 5.875"	0.277"	0.358"	0.635"

max dimensions shown

Item	Description	Material
1	LabTecta®TP Stationary	Phosphor Bronze
2	LabTecta®TP Rotary	Stainless Steel (std) / Phosphor Bronze (optional)
3	Stator Housing O-Ring	FKM
4	Rotor O-Ring	FKM
5	Dynamic O-Ring	FKM

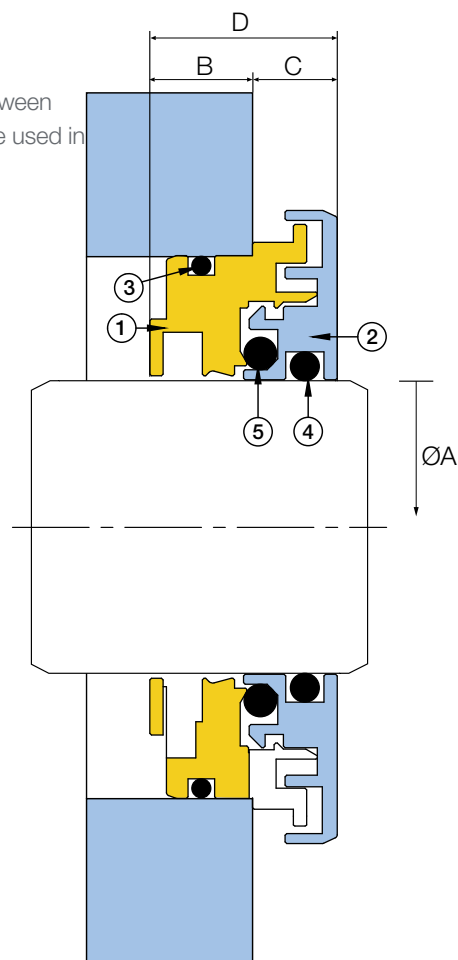

Protecting Electrical Motors

Approximately 51% of motor failures** are caused by bearing failure.

LabTecta®TP products:

- Protect against the major cause of bearing failure
- Meet the requirements of IEEE standard 841-2009
- Improve electrical safety by preventing water ingress
- Eliminate motor shaft damage due to rubbing
- Are maintenance free



IEEE 841-2009 (the premier standard for electrical motors) requires an ingress protection rating of IP55 and the use of a non-contacting rotating device to seal contaminants from the bearing chamber.


** IEEE Petrochem Paper PCIC-94-01



LabTecta®TP – Designed for Your Equipment

Sketch Housing Dimensions:

Either use the “standard” diagram provided or sketch your own below.

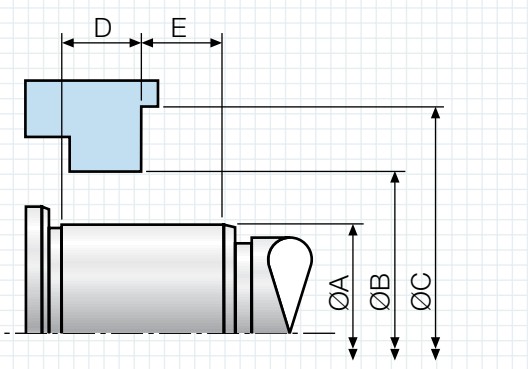

Dimensions:

ØA (Shaft Ø):

ØB (Housing bore Ø):

ØC (First obstruction on face):

D (Max. insertion):

E (First obstruction):

Application Data:

Equipment type:

Shaft horizontal or vertical:

Speed:

Bearing type:

Lubrication type / system:

Max. axial movement:

Complete the information above and send to:

UK Fax: **+44 (0) 1709 720788** USA Fax: **+1 865 531 0571** E-mail: **sales@labtecta.com**

Further information about the AESSEAL® LabTecta®66 range is available in the standard LabTecta®66 brochure.

E-mail: **sales@labtecta.com** to request a copy or download it from our website: **www.labtecta.com**

This brochure is fully recyclable. When laminated, a sustainable, biodegradable and recyclable lamination is used.

For further information and safe operating limits contact our technical specialists at the locations below.



UK Sales & Technical advice:

AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham,
S60 1BZ, UK
Tel: +44 (0) 1709 369966
E-mail: **enquiries@aes seal.info**
www.aes seal.com

AESSEAL plc is certified to:

ISO 9001, ISO 14001, ISO/IEC 20000, ISO/IEC 27001,
ISO/TS 29001, ISO 37001, ISO 45001 & ISO 50001



Net Zero champions globally



Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing



USA Sales & Technical advice:

AESSEAL Inc.
355 Dunavant Drive
Rockford,
TN. 37853,
USA

Tel: +1 865 531 0192
E-mail: **usa@aes seal.com**
www.aes seal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.

LIT-UK/US-L-Lab-TP-05PDF Copyright © 2022 AESSEAL plc 06/2022