






AESSEAL PACKING STYLE 260

Combination Braid Made of PTFE and Para-Aramid Fiber with Silicone Run In Lubricant

Characteristics

- Universal packing for abrasive media which need a reinforced, wear resistant and form stable packing
- Shaft protecting through good coefficient of friction
- No contamination of media

Operating range

			
p [psi]	360	7250	3630
v [fpm]	3940	390	
t °F	-150 ... +540		
pH	2 - 12		
lb/in ³	0.0524		

Practical useful application data:

max. temperature: +390 °F

max. pressure centrifugal pumps: 290 psi



max. velocity centrifugal pumps: 2953 fpm

Main application

- Centrifugal pumps
- Mixer
- Kneader
- Agitators
- Filter
- Extruder
- Refiner

Suitable for

- Chemical industry
- Pulp and paper industry

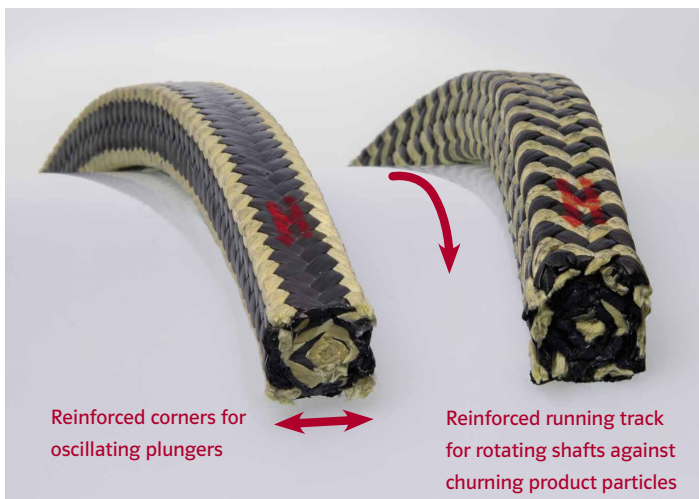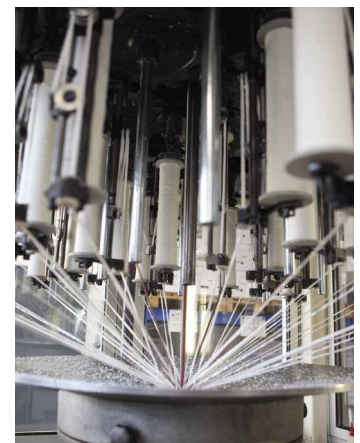

Form of delivery

This packing can be manufactured from 6 to 40 mm / 1/4" to 1.5" square as well as in intermediate, inch sizes and special measurements.

06-09 mm/1/4"-5/16" on 2 lbs spool

10-15 mm/3/8"-9/16" on 5 lbs spool

16-25 mm/5/8"-1" on 10 lbs spool

Special length, pre-cut or die formed rings on request.

1 lbs of packing of the following cross-sections is equivalent to displayed lengths in feet:

Size	Feet	Size	Feet
6	28.5	14 [9/16"]	5.2
6.4 [1/4"]	25.4	15	4.6
8 [5/16"]	16.0	16 [5/8"]	4.0
9.5 [3/8"]	11.4	18	3.2
10	10.3	19 [3/4"]	2.8
11 [7/16"]	8.3	20	2.6
12	7.1	22 [7/8"]	2.1
13 [1/2"]	6.4	25 [1"]	1.6

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.

Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

Please note that the technical values cannot be used all at the same time in their maximum values.