






## ENVIROSTAR 200

Pre-compressed Packing set of specially impregnated PTFE fiber packing

### Characteristics

Ring set made of pure PTFE packing fulfills with a tested leakage of  $6.3 \times 10^{-6}$  mbar · l/(s·m) the leakage criteria according to VDI 2440 +200 °C with a maximum allowable leakagerate of  $1 \times 10^{-4}$  mbar l/(sm) at 40 bar.

### Operating range

			
p [bar]	25	250	500
v [m/s]	2	0	-
t °C	-200 ... +280		
pH	0 - 14		

### Main application


- Valves
- Flaps
- Gate valves
- Fittings

### Suitable for

- Chemical industry
- Petrochemical plants

### Approvals

- TA Luft / VDI 2440 Certificate
- BAM 60 °C / 30 bar
- FDA
- EU 10/2011, EC 1935:2004

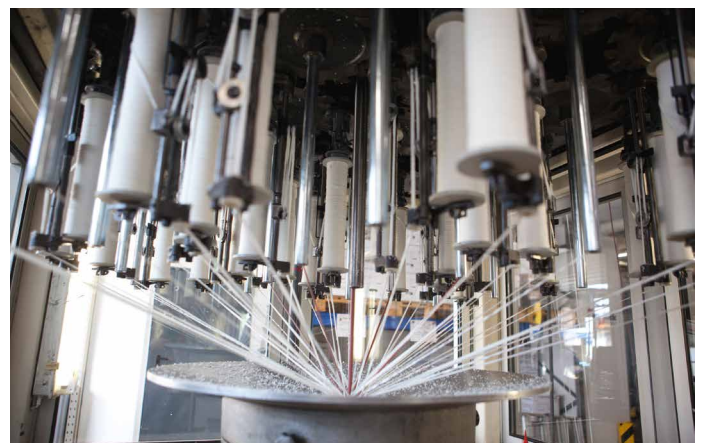

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.

Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

Please note that the technical values cannot be used all at the same time in their maximum values.