



CMAX™

Cartridge Single Seal with Axial Movement

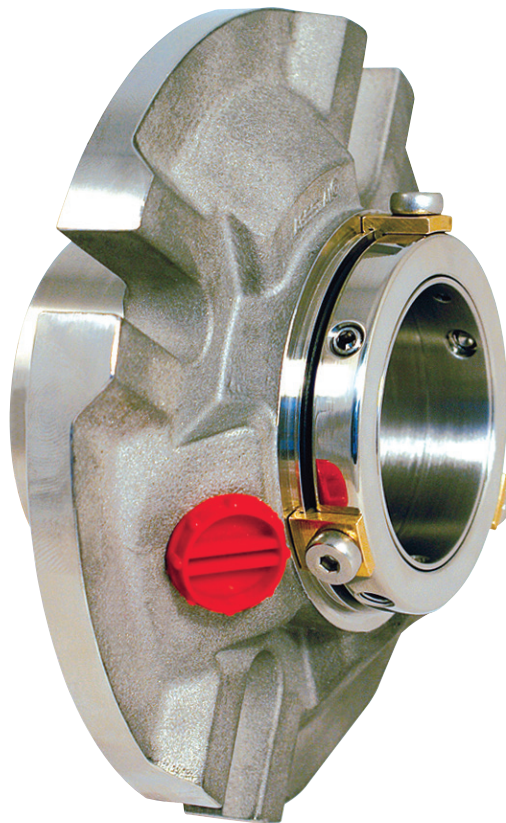


- Accepts up to 0.315" (8.0mm) axial shaft growth due to thermal conditions
- Balanced Seal Faces
- Easy To Install
- Modern User-Friendly Design
- Excellent General Service Seal

CMAX™ TYPE 'A'

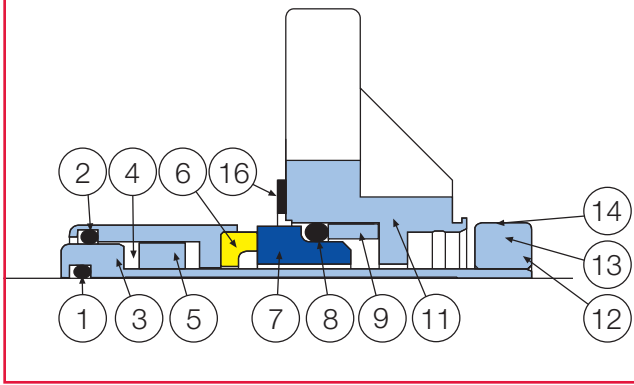

CMAX™ TYPE 'B'

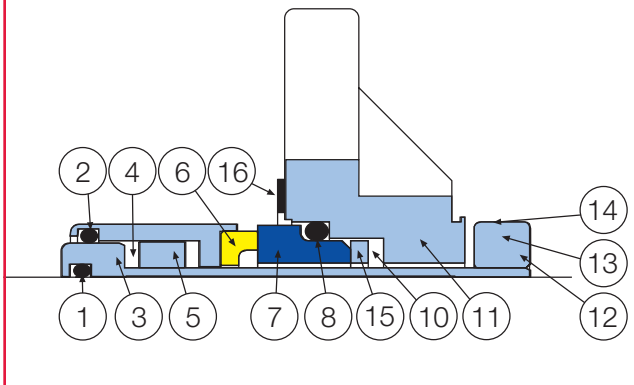

Item	Description	Material
1	Static O Ring	FKM / EPR / FFKM / TFE/P
2	Dynamic O Ring	FKM / EPR / FFKM / TFE/P
3	Cartridge Sleeve	316L Stainless Steel
4	Springs	Alloy 276
5	Rotary Spring Plate	316L Stainless Steel
6	Rotary Face	316L SS - Carbon / TC / SiC*
7	Stationary Face	TC / Ceramic / SiC / 316L SS-Chr.Ox.**
8	Dynamic O Ring	FKM / EPR / FFKM / TFE/P
9	Spacer Ring (Type A only)	316L Stainless Steel
10	Springs (Type B only)	Alloy 276
11	Gland	316 Stainless Steel
12	Clamp Ring	316L Stainless Steel
13	Drive Screws (not shown)	Stainless Steel
14	Clips & Clipscrews (not shown)	Metal - Stainless Steel
15	Stat. Spring Plate (Type B only)	316L Stainless Steel
16	Gasket	GFT

*This material is not available in some sizes above 4.000" (100mm).
 **This material is not available from 0.000" to 2.125" (53mm).

STANDARD CMAX™ RANGE DIMENSIONAL DATA

IMPERIAL (INCH) SIZE RANGE DIMENSIONAL DATA											
Seal Size	Gland O/D	Axial Movement		Gland Thickness	Stuffing Box		Bolt Circle Dia		Max Bolt Dia	Seal Length	
		TYPE 'A'	TYPE 'B'		Min	Max	Min	Max		Inboard	Outboard
1.000	4.125	0.134	0.201	0.519	1.625	1.937	2.687	3.562	1/2	1.500	1.690
1.125	4.250	0.134	0.201	0.519	1.750	2.062	2.812	3.687	1/2	1.500	1.690
1.250	4.375	0.134	0.201	0.519	1.875	2.187	2.937	3.812	1/2	1.500	1.690
1.375	4.375	0.134	0.201	0.519	2.000	2.250	3.062	3.812	1/2	1.500	1.690
1.500	5.000	0.134	0.201	0.644	2.250	2.375	3.375	4.437	1/2	1.500	1.815
1.625	5.000	0.134	0.201	0.644	2.375	2.500	3.375	4.437	1/2	1.500	1.815
1.750	5.500	0.134	0.201	0.644	2.500	2.750	3.750	4.937	1/2	1.500	1.815
1.875	5.500	0.134	0.201	0.644	2.625	2.875	3.750	4.937	1/2	1.500	1.815
2.000	6.000	0.134	0.201	0.644	2.750	3.000	4.125	5.437	1/2	1.500	1.815
2.000-AC	5.250	0.134	0.201	0.644	2.750	3.000	4.000	4.750	1/2	1.500	1.815
2.125	6.000	0.134	0.201	0.644	2.875	3.125	4.125	5.437	1/2	1.500	1.815
2.250	6.500	0.134	0.201	0.644	3.000	3.250	4.500	5.812	5/8	1.500	1.815
2.375	6.500	0.134	0.201	0.644	3.125	3.375	4.500	5.812	5/8	1.500	1.815
2.500	7.000	0.210	0.315	0.769	3.375	3.625	5.000	6.312	5/8	2.125	2.065
2.625	7.000	0.210	0.315	0.769	3.500	3.750	5.000	6.312	5/8	2.125	2.065
2.750	7.000	0.210	0.315	0.769	3.625	3.875	5.000	6.312	5/8	2.125	2.065
2.875	7.500	0.210	0.315	0.769	3.750	4.125	5.625	6.812	5/8	2.125	2.065
3.000	7.500	0.210	0.315	0.769	3.875	4.250	5.625	6.812	5/8	2.125	2.065
3.125	7.500	0.210	0.315	0.769	4.000	4.375	5.625	6.812	5/8	2.125	2.065
3.250	8.000	0.210	0.315	0.769	4.125	4.500	6.125	7.187	3/4	2.125	2.065
3.375	8.000	0.210	0.315	0.769	4.250	4.625	6.125	7.187	3/4	2.125	2.065
3.500	8.000	0.210	0.315	0.769	4.375	4.750	6.125	7.187	3/4	2.125	2.065
3.625	8.500	0.210	0.315	0.769	4.500	5.000	6.750	7.687	3/4	2.125	2.065
3.750	8.500	0.210	0.315	0.769	4.625	5.125	6.750	7.687	3/4	2.125	2.065
3.875	8.500	0.210	0.315	0.769	4.750	5.250	6.750	7.687	3/4	2.125	2.065
4.000	9.000	0.210	0.315	0.769	4.875	5.500	7.437	8.187	3/4	2.125	2.065
4.125	9.000	0.210	0.315	0.769	5.125	5.875	7.437	8.187	3/4	2.125	2.065
4.250	9.000	0.210	0.315	0.769	5.125	5.875	7.437	8.187	3/4	2.125	2.065
4.375	9.500	0.210	0.315	0.769	5.375	6.250	7.812	8.687	3/4	2.125	2.065
4.500	9.500	0.210	0.315	0.769	5.375	6.250	7.812	8.687	3/4	2.125	2.065
4.625	10.000	0.210	0.315	0.769	5.625	6.625	8.312	9.062	7/8	2.125	2.065
4.750	10.000	0.210	0.315	0.769	5.625	6.625	8.312	9.062	7/8	2.125	2.065
4.875	10.000	0.210	0.315	0.769	5.875	6.625	8.312	9.062	7/8	2.125	2.065
5.000	10.000	0.210	0.315	0.769	5.875	6.625	8.312	9.062	7/8	2.125	2.065

AC = Designed to Suit the Allis Chalmers CSO Pump.

INBOARD & OUTBOARD LENGTHS QUOTED ARE WHEN SEAL IS SET AT MID POSITION

STANDARD CMAX™ RANGE DIMENSIONAL DATA

METRIC (MM) SIZE RANGE DIMENSIONAL DATA											
Seal Size	Gland O/D	Axial Movement		Gland Thickness	Stuffing Box		Bolt Circle Dia		Max Bolt Dia	Seal Length	
		TYPE 'A'	TYPE 'B'		Min	Max	Min	Max		Inboard	Outboard
24	104.8	3.4	5.0	13.2	40.0	46.0	67.0	90.5	12	38.1	43.0
25	104.8	3.4	5.0	13.2	41.0	49.0	67.0	90.5	12	38.1	43.0
28	108.0	3.4	5.0	13.2	44.0	52.3	70.3	93.6	12	38.1	43.0
30	111.0	3.4	5.0	13.2	46.0	55.5	73.5	96.8	12	38.1	43.0
32	111.0	3.4	5.0	13.2	48.0	55.5	73.5	96.8	12	38.1	43.0
33	111.0	3.4	5.0	13.2	49.0	55.5	73.5	96.8	12	38.1	43.0
35	111.0	3.4	5.0	13.2	51.0	57.5	76.6	96.8	12	38.1	43.0
38	127.0	3.4	5.0	16.4	57.2	60.4	85.7	114.3	12	38.1	46.1
40	127.0	3.4	5.0	16.4	58.0	60.4	85.7	114.3	12	38.1	46.1
43	139.7	3.4	5.0	16.4	61.0	69.9	95.3	127.0	12	38.1	46.1
45	139.7	3.4	5.0	16.4	63.5	69.9	95.3	127.0	12	38.1	46.1
48	139.7	3.4	5.0	16.4	66.7	73.0	95.3	127.0	12	38.1	46.1
50	152.4	3.4	5.0	16.4	68.0	76.2	104.8	139.7	12	38.1	46.1
53	152.4	3.4	5.0	16.4	71.0	76.2	104.8	139.7	12	38.1	46.1
55	165.1	3.4	5.0	16.4	74.0	82.5	114.3	149.2	16	38.1	46.1
58	165.1	3.4	5.0	16.4	76.2	82.6	114.3	149.2	16	38.1	46.1
60	165.1	3.4	5.0	16.4	79.4	85.7	114.3	149.2	16	38.1	46.1
63	177.8	5.3	8.0	19.6	85.8	92.1	127.0	160.3	16	54.0	52.5
65	177.8	5.3	8.0	19.6	88.9	95.3	127.0	160.3	16	54.0	52.5
68	177.8	5.3	8.0	19.6	92.1	98.4	127.0	160.3	16	54.0	52.5
70	177.8	5.3	8.0	19.6	92.1	98.4	127.0	160.3	16	54.0	52.5
75	190.5	5.3	8.0	19.6	98.5	108.0	142.9	173.0	16	54.0	52.5
80	190.5	5.3	8.0	19.6	101.6	111.1	142.9	173.0	16	54.0	52.5
85	203.2	5.3	8.0	19.6	108.0	117.5	155.6	182.5	20	54.0	52.5
90	215.9	5.3	8.0	19.6	114.3	127.0	171.5	195.2	20	54.0	52.5
95	215.9	5.3	8.0	19.6	117.5	130.2	171.5	195.2	20	54.0	52.5
100	228.6	5.3	8.0	19.6	123.9	139.7	188.9	207.9	20	54.0	52.5
105	228.6	5.3	8.0	19.6	130.1	149.2	189.0	208.0	20	54.0	52.5
110	241.3	5.3	8.0	19.6	136.5	158.8	198.4	220.6	20	54.0	52.5
115	254.0	5.3	8.0	19.6	142.9	168.3	211.1	230.2	22	54.0	52.5
120	254.0	5.3	8.0	19.6	142.9	168.3	211.1	230.2	22	54.0	52.5
125	254.0	5.3	8.0	19.6	142.9	168.3	211.1	230.2	22	54.0	52.5

INBOARD & OUTBOARD LENGTHS QUOTED ARE WHEN SEAL IS SET AT MID POSITION

This brochure is fully recyclable. When laminated, a sustainable, biodegradable and recyclable lamination is used.

For further information and safe operating limits contact our technical specialists at the locations below.



AESSEAL plc is certified to:

ISO 9001, ISO 14001, ISO/IEC 20000, ISO/IEC 27001,
 ISO/TS 29001, ISO 37001, ISO 45001 & ISO 50001

Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing

UK Sales & Technical advice:

AESSEAL plc
 Mill Close
 Bradmarsh Business Park
 Rotherham,
 S60 1BZ, UK
 Tel: +44 (0) 1709 369966
 E-mail: enquiries@aes seal.info
www.aes seal.com



Net Zero champions globally



USA Sales & Technical advice:

AESSEAL Inc.
 355 Dunavant Drive
 Rockford,
 TN. 37853,
 USA
 Tel: +1 865 531 0192
 E-mail: usa@aes seal.com
www.aes seal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.