

# HEAT GUARD

Protect Employees Against Burns From Hot Systems



## Features

- Stays 40°C (104°F) cooler than the vessel temperature
- Perforated to allow system to dissipate heat
- Retrofittable design

## Benefits

- Protects employees from burns when the vessel is touched
- Will not affect the system and mechanical seal performance
- Allows it to be installed onto vessels currently in operation




Industrial applications are hazardous places for personnel to work especially when hot oil seal support vessels are in use. Health and Safety Regulations stipulate that protective clothing and guarding should be provided where objects with surface temperatures greater than 50°C (122°F) are present.

The AESSEAL® **Heat Guard** is ideal where SP range (eg. SSE12) and AES-15 vessels are in use at temperatures greater than the health and safety limit. Fitted to the vessel the **Heat Guard** remains 40°C (104°F) cooler than the vessel body and so ensuring that site personnel cannot injure themselves by accidentally touching the dangerously hot vessel body.

Retrofittable design allows it to be installed onto vessels currently in operation once they have cooled to a temperature that is safe to touch.

## Performance:

The below graph shows that with a vessel temperature at 72°C (161°F) the **Heat Guard** maintains a 32°C (90°F) temperature, when the ambient temperature is at 20°C (68°F) and it is not in direct sunlight, ensuring that if it is accidentally touched it does not cause injury.

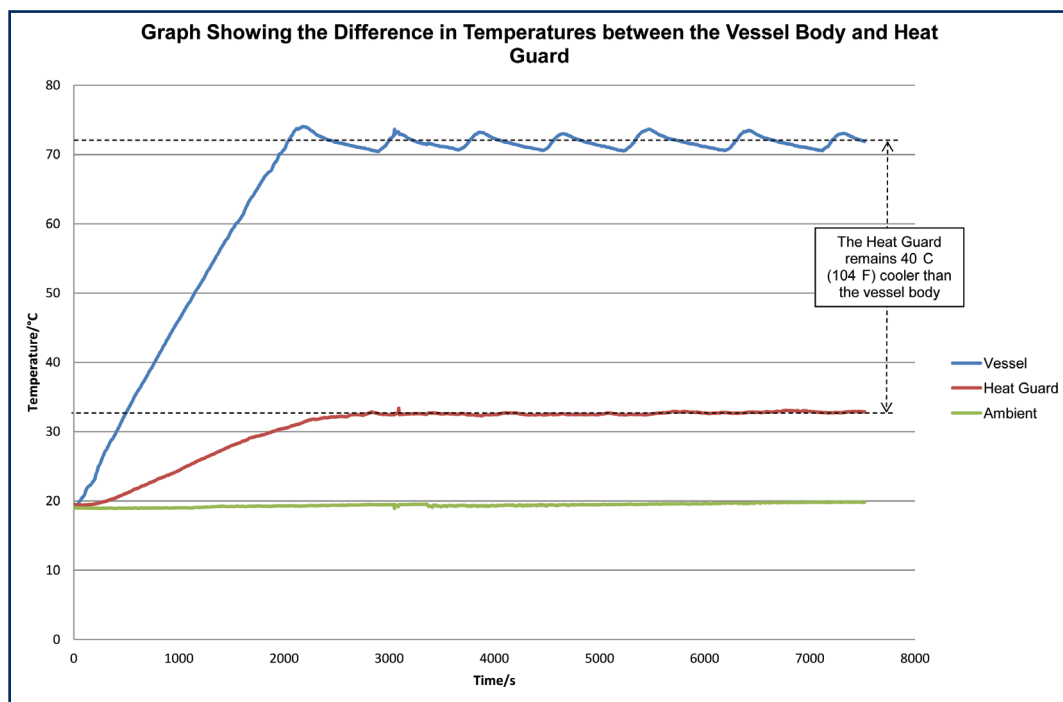

This brochure is fully recyclable. When laminated, a sustainable, biodegradable and recyclable lamination is used.

For further information and safe operating limits contact our technical specialists at the locations below.



### UK Sales & Technical advice:

AESSEAL plc  
Mill Close  
Bradmarsh Business Park  
Rotherham,  
S60 1BZ, UK  
Tel: +44 (0) 1709 369966  
E-mail: [enquiries@aes seal.info](mailto:enquiries@aes seal.info)  
[www.aes seal.com](http://www.aes seal.com)

### AESSEAL plc is certified to:

ISO 9001, ISO 14001, ISO/IEC 20000, ISO/IEC 27001,  
ISO/TS 29001, ISO 37001, ISO 45001 & ISO 50001



Net Zero champions globally



Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing



### USA Sales & Technical advice:

AESSEAL Inc.  
355 Dunavant Drive  
Rockford,  
TN. 37853,  
USA  
Tel: +1 865 531 0192  
E-mail: [inquiries@aes seal.us](mailto:inquiries@aes seal.us)  
[www.aes seal.us](http://www.aes seal.us)

**Important:** Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.