






AESSEAL PACKING STYLE 795TP-Unistar

Braid of ePTFE yarn with Incorporated Graphite and Silicone Run In Lubricant

Characteristics

- Excellent heat conductivity
- Maximum protection of shaft against wear (HRC 25 is sufficient)
- Extended MTBF
- Easy and safe installation and handling
- No ageing process

Operating range

			
p [psi]	360	3630	1450
v [fpm]	4920	390	
t °F	-150 ... +540		
pH	0 - 14		
lb/in ³	0.0560		

Main application


- Centrifugal pumps
- Mixer
- Agitators
- Autoclave
- Filter
- Refiner
- Kneader
- Paddle dryer
- Vacuum pumps

Suitable for


- Universal use
- Waste water technology
- Acids
- Alkaline solutions
- Oil and grease



Conventional square packing

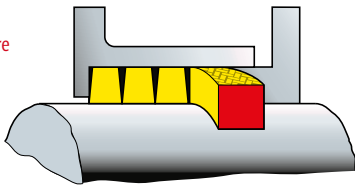

AESSTAR technology

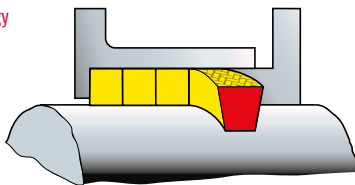

Form of delivery

This packing can be manufactured from 10 to 40 mm / 3/8" to 1.5" as well as in intermediate, inch sizes and special measurements.

Available from 4 to 9 mm / 3/16" - 5/16" in square X-Section as Style 787.

04 - 09 mm/3/16"-5/16" on 2lbs spool
10-15 mm/3/8"-9/16" on 5 lbs spool
16-25 mm/5/8"-1" on 10 lbs spool

Special length, pre-cut or die formed rings on request.

1 lbs of packing of the following cross-sections is equivalent to displayed lengths in feet:

Size	Feet	Size	Feet
4	60.0	13 [1/2"]	6.0
5 [3/16"]	38.4	14 [9/16"]	4.9
6	26.7	15	4.3
6.4 [1/4"]	23.8	16 [5/8"]	3.7
8 [5/16"]	15.0	18	3.0
9.5 [3/8"]	10.6	19 [3/4"]	2.7
10	9.6	20	2.4
11 [7/16"]	7.8	22 [7/8"]	2.0
12	6.7	25 [1"]	1.5

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.

Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

Please note that the technical values cannot be used all at the same time in their maximum values.